


# COMPLETE RANGE **TANDEM TRAILERS** AND TURNTABLE TRAILERS



Lightweight  
professional  
trailers up to  
3.5 t



# Experience it for yourself

Our rationale makes it easy for you to become a staunch follower of Humbaaur's high-quality products.



## Follow HUMBAUR!

*"Because HUMBAUR is a brand that I can rely on."*

### **35 years of experience**

We have been one of the leading manufacturers of car trailers for over 35 years. Over 1,000,000 trailers have left our premises since our company was founded. Nowadays, we produce around 60,000 units per year. And our wealth of experience is reflected in each of our trailers.

### **High quality**

Robust and long-lasting — that's what a trailer needs to be. We use outstanding components and first-rate workmanship to achieve this goal. Before we deliver each trailer, we put it through its paces.

### **A wide range of transportation solutions**

Our offering covers a very wide range of uses. Whether you are looking for a trailer for private or commercial needs, we can provide you with the appropriate model. You can choose a maximum gross weight between 750 kg and 55 t.

### **Wide range of accessories**

Do you have very specific demands on your trailer? Thanks to a number of matching accessories, you can add to the comprehensive standard equipment to meet your requirements accordingly.

### **Committed customer service**

If your trailer weighs up to 3.5 t, your specialist dealer in your area will be happy to help. Owners of trailers weighing in excess of 5 t total weight are able to take advantage of our direct service. Whether you need a spare part or have a question about how to use your trailer – we, together with your local dealer, will be happy to help.

### **High-quality components**

Quality is reflected in the detail—that's why Humbaaur only uses high-quality vehicle components produced by reputable manufacturers. We continuously share our experiences with our suppliers. This enables us to keep improving our products.

# Table of contents

Experience it for yourself .....	2
Overview .....	4
HA tandem flatbed trailer .....	6
HN tandem wheels-in trailer .....	10
HT tandem wheels-in trailer .....	14
Turntable trailer .....	18
Optional accessories.....	22
About Humbaur .....	26



# The 2000 series

Perfect for building contractors or passionate gardeners

## HA aluminium tandem flatbed trailer



This trailer can be used to transport materials, gardening equipment or whatever else you need. Our HA flatbed trailer can be equipped with a wide variety of accessories and is suitable for all kinds of applications. Its design ensures stability and a long service life. The frame and side plates are made of robust aluminium. The 15-mm-thick base plate with multiple layers of water-resistant glue has a non-slip coating. The base plate can be easily replaced if necessary. Six recessed tie-down hoops in the side walls ensure that you can secure your load in the best possible manner: Each tie-down hoop holds 400 kg, as tested by Dekra.

## HN aluminium tandem wheels-in trailer



The HN wheels-in trailer is certain to impress with its low loading height of up to 610 mm. With its robust design, it has proven itself to be more than adequate for daily professional use over many years. In addition, the frame and chassis are completely hot-dip galvanised to protect them against corrosion. Carefully considered design features, such as the retractable lashing rings, make operation easier and save time. Thanks to the wide range of box dimensions and load capacities that we offer, you are certain to find the right wheels-in trailer for your transport needs. Our extensive range of accessories offers even more customisation options.

### **HT aluminium tandem wheels-in trailer**



Everything that a professional needs: A sturdy wheels-in trailer with a completely hot-dip galvanised frame and chassis. All major components such as the side members and underrun protection have also been protected from corrosion. Recessed lashing rings are used to secure the load. Each individual lashing ring can withstand a tensile force up to 400 kg, as tested by Dekra. The robust side plates are made of anodised aluminium with recessed fasteners, and, like the hot-dip galvanised corner stanchions, can be completely removed. You're sure to find the perfect trailer for your transport tasks with our extensive range of accessories and different model variants.

## **The 8400 series**

### **Turntable trailers Two-axle and three-axle variants**



This trailer offers a huge load capacity and has attractive anodised aluminium side plates. The turntable wheels-in trailer glides along safely on three rubber suspension axles and special tyres, which also ensure a low loading height. You can choose from box dimensions ranging from five to eight metres long. The load capacity ranges from 2.3 to 2.67 tonnes depending on the model and equipment. Eight to ten solid lashing rings can be used to secure your load during transport. Thanks to the ball bearing turntable, the three-axle trailer is particularly comfortable to drive and easy to manoeuvre.

# HA TANDEM FLATBED TRAILER



# HA FLATBED TRAILER

The multifunctional transport aid for a wide range of tasks.

Transport building materials, construction tools, construction machinery, garden tools and whatever else you want. Our HA flatbed trailer can be equipped with a wide variety of accessories and is suitable for all kinds of applications. Its design ensures stability and a long service life. The side plate frame construction is made of robust aluminium profiles. The 15-mm-thick base plate with multiple layers of water-resistant glue has a non-slip coating. Six recessed tie-down hoops in the side walls ensure that you can secure your load in the best possible manner: Each tie-down hoop holds 400 kg, as tested by Dekra.



# HA TANDEM FLATBED TRAILER

## TECHNICAL DATA

### HA 202513 KV

Overall dimensions	3940 x 1810 x 900 mm
Internal dimensions	2510 x 1310 x 350 mm
Total permissible weight	2000 kg
Load capacity	1670 kg
Loading height	525 mm
Tyres	13"

### HA 203015 KV

Overall dimensions	4460 x 2004 x 900 mm
Internal dimensions	3030 x 1500 x 350 mm
Total permissible weight	2000 kg
Payload capacity	1633 kg
Loading height	525 mm
Tyres	13"

### HA 253015 KV

Overall dimensions	4460 x 2004 x 930 mm
Internal dimensions	3030 x 1500 x 350 mm
Total permissible weight	2500 kg
Payload capacity	2113 kg
Loading height	550 mm
Tyres	15"







## ACCESSORIES OPTIONAL

- 2 prop stands
- Wheel shock absorbers (with and without 100 km/h approval)
- H-frame, welded
- Railing set (side, front and rear)
- Aluminium side plate extension
- Wood/aluminium cover
- Railing for wood/aluminium cover
- Spare wheel bracket
- 7-pin to 13-pin adapter
- Covering net
- 1 bicycle stand rail with bracket
- 2 crossbars for bicycle stand rails, width 1310 mm
- Flat tarpaulin, blue – in conjunction with railing
- Tarpaulin and frame in various designs

## OVERVIEW KEY DETAILS

- V drawbar, hot-dip galvanised
- 13-pin plug
- Base plate, 15 mm thick
- Side plates made of anodised aluminium
- Gates with recessed fasteners
- Side plates made of anodised aluminium
- 3 pairs of lashing rings integrated in the side plates; tensile force of 400 kg per lashing ring (tested by DEKRA)
- Jockey wheel
- Plastic mudguards
- Humbaур multifunctional lighting with reversing lights



3 pairs of lashing eyes integrated into the side plate, each capable of withstanding a tensile force of 400 kg



Aerodynamic plastic mudguards



Insertion options at the corners



Flap with recessed closures

# HN TANDEM WHEELS-IN TRAILER



# HN WHEELS-IN TRAILER

## A brilliant aid for challenging applications

The HN wheels-in trailer is certain to impress with its low loading height of up to 610 mm. With its robust design, it has proven itself to be more than adequate for daily professional use over many years. In addition, the frame and chassis are completely hot-dip galvanised to protect them against corrosion. Carefully considered design features, such as the retractable lashing rings, make operation easier and save time. Thanks to the wide range of box dimensions and load capacities that we offer, you are certain to find the right wheels-in trailer for your transport needs. Our extensive range of accessories offers even more customisation options.



# HN TANDEM WHEELS-IN TRAILER

## TECHNICAL DATA

Trailers	Overall dimensions	Interior dimensions	GVW	Load capacity	Load height	Tyres
	in mm	in mm	in kg	in kg	in mm	in inches
<b>HN 202616</b>	4054x1713x930	2650x1650x300	2000	1570	610	10
<b>HN 203116</b>	4507x1713x935	3100x1650x300	2000	1540	610	10
<b>HN 253118</b>	4501x1913x1000	3100x1850x350	2500	2005	610	10
<b>HN 253121</b>	4475x2163x1000	3100x2100x350	2500	1983	610	10
<b>HN 254118</b>	5490x1913x1000	4100x1850x350	2500	1925	610	10
<b>HN 254121</b>	5475x2163x1000	4100x2100x350	2500	1905	610	10
<b>HN 303118</b>	4501x1913x1000	3100x1850x350	3000	2495	610	10
<b>HN 303121</b>	4475x2163x1000	3100x2100x350	3000	2460	610	10
<b>HN 304118</b>	5490x1913x1000	4100x1850x350	3000	2420	620	10
<b>HN 304121</b>	5475x2163x1000	4100x2100x350	3000	2380	610	10

Trailers	Overall dimensions	Interior dimensions	GVW	Load capacity	Load height	Tyres
	in mm	in mm	in kg	in kg	in mm	in inches
<b>HN 305221 GR</b>	6635x2136x1120	5220x2070x350	3000	2280	645	10
<b>HN 305225 GR</b>	6900x2536x1120	5220x2470x350	3000	2150	620	10
<b>HN 306221 GR</b>	7620x2136x1120	6220x2070x350	3000	2120	620	10
<b>HN 306225 GR</b>	7905x2536x1120	6220x2470x350	3000	2020	620	10
<b>HN 355221 GR</b>	6634x2136x1120	5220x2070x350	3500	2633	650	13
<b>HN 355225 GR</b>	6900x2536x1120	5220x2470x350	3500	2540	650	13
<b>HN 356221 GR</b>	7660x2136x1120	6220x2070x350	3500	2538	650	13
<b>HN 356225 GR</b>	7870x2536x1120	6220x2470x350	3500	2430	650	13





Corner stanchion pockets and stanchions removable, galvanised

## ACCESSORIES OPTIONAL

- 2 telescopic crank supports
- Height-adjustable drawbar
- Wheel shock absorbers (with and without 100 km/h approval)
- Long drawbar
- Aluminium side plate extension
- Spare wheel and bracket
- 7-pin to 13-pin adapter
- Covering net
- Aluminium panels that can be retracted under the loading area
- H-frame
- Tarpaulin and frame in various designs
- Spare wheel/spare wheel bracket

## OVERVIEW KEY DETAILS

- V drawbar, hot-dip galvanised
- 13-pin plug
- Base plate, 18 mm thick
- Side plates made of anodised, double-walled aluminium with recessed fasteners, completely removable
- Lashing rings integrated in a V-shaped outer frame profile; each ring can withstand a tensile force of 400 kg (tested by DEKRA)
- Humbaur multifunctional lighting with reversing lights integrated in the underrun protection
- Removable corner stanchions with slots for equipping the trailer with optional equipment
- Jockey wheel



13-pole plug



Insertion options at all four corners



Up to internal dimensions 5220 x 2070 mm  
Base plate in one piece



Tarpaulin & bows, various  
Loading height (optional)

# HT TANDEM WHEELS-IN TRAILER



# HT WHEELS-IN TRAILER

## The universal workhorse – robust and versatile

Everything that a professional needs: A sturdy wheels-in trailer with a completely hot-dip galvanised frame and chassis. All major components such as the side members and underrun protection have also been protected from corrosion. Recessed lashing rings are used to secure the load. Each individual lashing ring can withstand a tensile force up to 400 kg, as tested by Dekra. The robust side plates are made of anodised aluminium with recessed fasteners, and, like the hot-dip galvanised corner stanchions, can be completely removed. You're sure to find the perfect trailer for your transport tasks with our extensive range of accessories and different model variants.



# HT TANDEM WHEELS-IN TRAILER

## TECHNICAL DATA

Trailers	Overall dimensions	Interior dimensions	GVW	Load capacity	Load height	Tyres
	in mm	in mm	in kg	in kg	in mm	in inches
<b>HT 202616</b>	4057x1713x1040	2650x1650x300	2000	1570	700	13
<b>HT 203116</b>	4514x1713x1060	3100x1650x300	2000	1538	720	13
<b>HT 253118</b>	4488x1913x1110	3100x1850x350	2500	1975	735	15
<b>HT 253121</b>	4475x2163x1110	3100x2100x350	2500	1970	725	15
<b>HT 254118</b>	5488x1913x1110	4100x1850x350	2500	1905	750	15
<b>HT 254121</b>	5476x2163x1110	4100x2100x350	2500	1885	725	15
<b>HT 303118</b>	4488x1913x1135	3100x1850x350	3000	2480	755	14
<b>HT 303121</b>	4475x2163x1135	3100x2100x350	3000	2445	755	14
<b>HT 304118</b>	5488x1913x1135	4100x1850x350	3000	2410	755	14
<b>HT 304121</b>	5476x2163x1135	4100x2100x350	3000	2358	755	14

Trailers	Overall dimensions	Interior dimensions	GVW	Load capacity	Load height	Tyres
	in mm	in mm	in kg	in kg	in mm	in inches
<b>HT 306221 GR</b>	7620x2136x1120	6220x2070x350	3000	2095	770	14
<b>HT 306225 GR</b>	7910x2536x1120	6220x2470x350	3000	1980	770	14
<b>HT 353118</b>	4788x1913x1140	3100x1850x350	3500	2940	770	14
<b>HT 353121</b>	4501x2163x1140	3100x2100x350	3500	2885	770	14
<b>HT 354118</b>	5517x1913x1140	4100x1850x350	3500	2862	770	14
<b>HT 354121</b>	5501x2163x1140	4100x2100x350	3500	2825	770	14
<b>HT 355221 GR</b>	6635x2136x1120	5220x2070x350	3500	2614	780	14
<b>HT 355225 GR</b>	6900x2536x1120	5220x2470x350	3500	2522	780	14
<b>HT 356221 GR</b>	7660x2136x1120	6220x2070x350	3500	2517	780	14
<b>HT 356225 GR</b>	7870x2536x1120	6220x2470x350	3500	2430	780	14








Tarpaulin &amp; bows, rear roll-up (optional)

## ACCESSORIES OPTIONAL

- 2 telescopic crank supports
- DIN towing eye or ball head coupling for height-adjustable drawbar
- Wheel shock absorbers (with and without 100 km/h approval)
- Long drawbar
- Aluminium side plate extension
- Spare wheel and bracket
- 7-pin to 13-pin adapter
- Covering net
- Aluminium panels that can be retracted under the loading area
- H-frame
- Tarpaulin and frame in various designs

## OVERVIEW KEY DETAILS

- V drawbar, hot-dip galvanised
- 13-pin plug
- Base plate, 18 mm thick
- Side plates made of anodised aluminium with recessed fasteners, completely removable
- Lashing rings integrated in a V-shaped outer frame profile; each ring can withstand a tensile force of 400 kg (tested by Dekra)
- Humba multifunctional lighting with reversing lights integrated in the underrun protection
- Removable corner stanchions with slots for equipping the trailer with optional equipment
- Jockey wheel

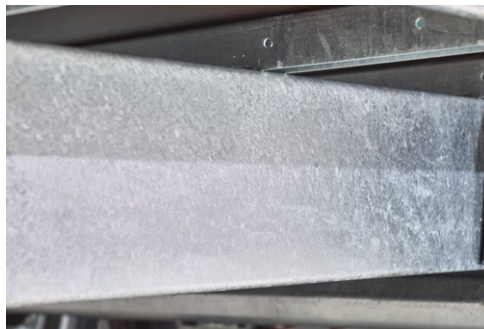

Frame and chassis hot dip galvanised



Wheel shock absorber, for 100 km/h version (optional)



Tool box under the loading area (optional)



Side plate extension, 350 mm (optional)

# TURNTABLE TRAILER



# TURNTABLE TRAILERS TWO-AXLE AND THREE-AXLE VARIANTS

**The transport aids for special tasks –  
available as two-axle or three-axle variants.**

This trailer looks great thanks to its side plates with anodised aluminium profiles and also provides a huge loading capacity. The turntable wheels-in trailer glides along safely on three rubber suspension axles and special tyres, which also ensure a low loading height. You can choose from box dimensions ranging

from five to eight metres long. The load capacity ranges from 2.3 to 2.67 tonnes. Eight to ten solid lashing rings can be used to secure your load during transport. Thanks to the ball bearing turntable, the three-axle trailer is particularly comfortable to drive and easy to manoeuvre.



# TURNTABLE TRAILER

## TECHNICAL DATA

Trailers	Overall dimensions	Interior dimensions	GVW	Load capacity	Load height	Tyres
	in mm	in mm	in kg	in kg	in mm	in inches
<b>HD 305121-2A</b>	6976x2163x1025	5100x2100x350	3000	2170	680	10
<b>HD 355121</b>	6976x2163x1025	5100x2100x350	3500	2585	680	10
<b>HD 355124</b>	6976x2543x1025	5100x2480x350	3500	2530	680	10
<b>HD 356121</b>	7976x2163x1025	6100x2100x350	3500	2485	680	10
<b>HD 356124</b>	7976x2543x1025	6100x2480x350	3500	2403	680	10
<b>HD 306121-2A</b>	7976x2163x1025	6100x2100x350	3000	2130	680	10
<b>HD 357121</b>	8976x2163x1025	7100x2100x350	3500	2385	680	10
<b>HD 357124</b>	8976x2543x1025	7100x2480x350	3500	2385	680	10
<b>HD 358124</b>	9976x2543x1025	8100x2480x350	3500	2200	680	10

TURNABLE TRAILER





Possible application  
(Container not available)

## ACCESSORIES OPTIONAL

- Spare wheel
- Wheel shock absorbers (with and without 100 km/h approval)
- H-frame
- 7-pin to 13-pin adapter
- Tarpaulin and frame in various designs
- 13" tyres instead of 10" tyres
- Aluminium panels with a load capacity of 2.8 t
- Side plate extension
- Divided side plates at a length of 5100 mm

## OVERVIEW KEY DETAILS

- Hot-dip galvanised V drawbar with ball bearing turntable and prop stand
- 13-pin plug
- Base plate, 18 mm thick
- Side plates made of anodised, double-walled aluminium with recessed fasteners — completely removable
- Lashing rings integrated in a V-shaped outer frame profile; each ring can withstand a tensile force of 400 kg (tested by Dekra)
- Divided side plates from a length of 6100 mm
- Humbaur multifunctional lighting with reversing lights



V drawbar mounted on the turntable with hardened steel bolts



Tie-down hoops integrated in the outer frame as standard



Central stanchions fitted on the divided side plates as standard (from an inner length of 6100 mm)



Corner stanchions can be removed when the side plates are lowered

# Our range of accessories

## Body



Side plate extension, 350 mm



Divided side plate with central stanchion



Railing on wood/aluminium cover



Crossbars for bicycle rails (2x, loose)




Side plate extension, 350 mm, with central stanchions



H-frame



Railing at the side

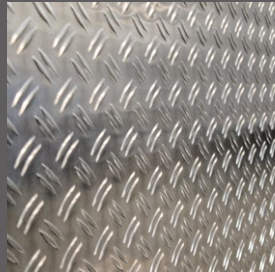

Floor plate with aluminium chequer plate



Wood/aluminium cover with base side plate (available loose or fitted)



Railing, front and rear




# Tailored to your requirements

## Chassis



AKS safety clutch

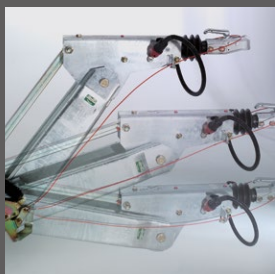

Height-adjustable drawbar (ball head coupling and DIN towing eye not included)



Aluminium panels (2x)




## Lighting/electrics



7-13-pin adapter



Ball head coupling for HV drawbar, 2000-2500 kg and 3000-3500 kg

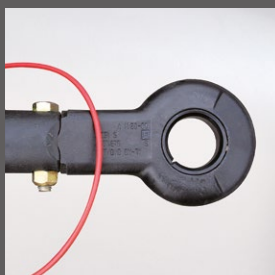


DIN towing eye for height-adjustable drawbar, 2000-2500 kg and 3000-3500 kg



Telescopic crank supports (2x)


## Anti-theft device

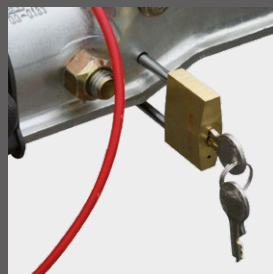

Padlock



Anti-theft Safety Compact

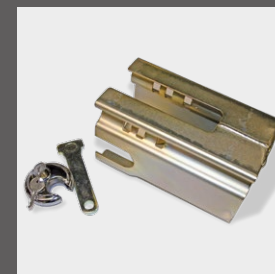

Metal locking shoe with lock

# Our range of accessories

## Chassis




Lashing rings recessed into wooden floor; each tie ring can withstand a tensile force of 0.2 t (4x)



Folding rings (4x)



Tie rings recessed into the wooden floor; each tie ring can withstand a tensile force of 0.4 t (4x or 6x)

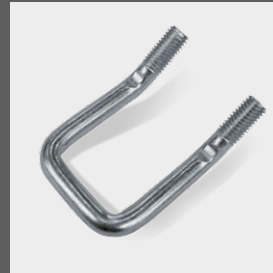

Tie-down hoops (incl. screws)



Bicycle stand rail with lockable bracket (1x)



## Wheels and tyres



Spare wheel (loose)



Spare wheel bracket (loose)



Tarpaulin and frame, load height 1000/1300/1600/1800 mm (version depends on model)










Wheel shock absorbers (mounted) incl. 100 km/h approval\*

\*Wheel shock absorbers (loose) without 100 km/h approval



# Tailored to your requirements

## Tarpaulin standard colours

	
White/similar to RAL 9010	Medium yellow/similar to RAL 1003
	
Orange/similar to RAL 2011	Red/similar to RAL 3002
	
Green/similar to RAL 6026	Blue/similar to RAL 5002
	
Grey/similar to RAL 7038	Please note that the colours shown may vary from the original colours.



Upon request, we are happy to create **customised signage** on tarpaulins

## Tarpaulins



Flat tarpaulin (can also be used with a side plate extension)



Flat tarpaulin (version without railing)



Flat tarpaulin (version with side railing) incl. front and rear railing



Tarpaulin and frame, loading height 1300 mm, 1600 mm, 1800 mm, 2000 mm

In addition to the **extensive standard equipment** for our trailer and vehicle bodies, we offer **a wide selection of accessories to suit each model.**

This means that you can configure just the right solution for your transport needs based on **your individual requirements** and they can grow alongside your transport requirements.


# Strengthened by experience

**Humbaur stands for** innovation and customer-oriented solutions. This approach has enabled this owner-managed, medium-sized family business to become the **European market leader**. With around **420 different standard trailer models** ranging from 750 kg to 55 tonnes for commercial and private clients and 230 models of the FlexBox vehicle bodies, it has the perfect solution to every transport problem. For over 35 years, we have built a wealth of experience, together with our trading partners and customers that is reflected in each of our products – **in sophisticated functions and details, greater user-friendliness and a high level of driving comfort.**


Our trademarks include robust and low-maintenance vehicles with an extensive range of standard equipment and wide range of accessories, plus the ability to offer customised solutions. Our own manufacturing expertise – ranging from small metal parts to polyester roofs or sandwich panels – combined with quality components from renowned manufacturers, ensures **durable products which retain their value well.**



Ulrich Humbaur  
Proprietor, Director

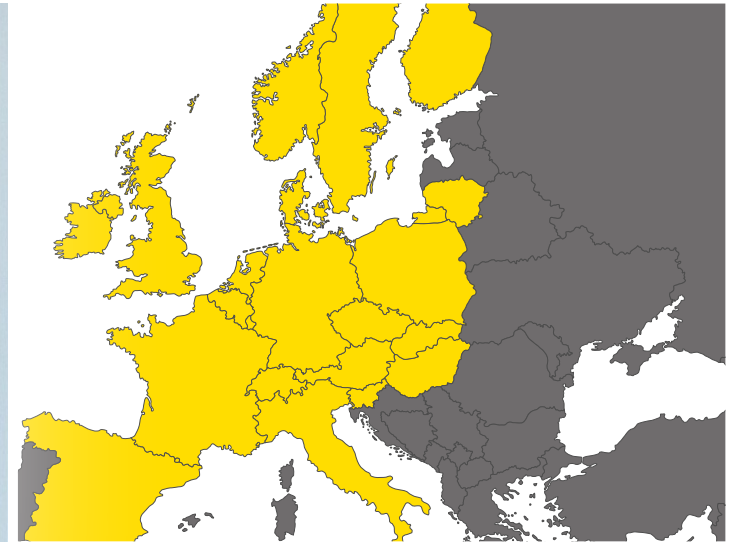

Together with our **partner network**, we provide comprehensive local support for all your transport problems. Together, we will find the right solution for your transport requirements and will take care of **servicing and repairs**. Our service includes reasonably priced repair options and the **long-term availability of spare parts**, so that you can enjoy and use your trailer or vehicle body for years to come.

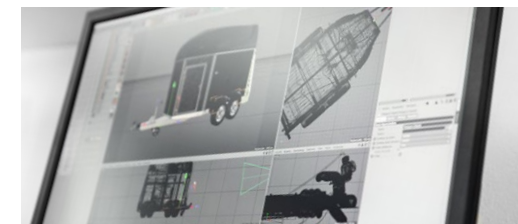

# Outstanding quality

We place great importance on the fact that our products operate even under **tough conditions** with no nasty surprises.

We construct our trailers in robust designs using suitable materials of the required strength. We simulate the hardest conceivable use for our trailers on various test tracks. We check the stability and durability of the chassis, frame and components at full load. This is how we ensure the **outstanding quality** of our trailers.



Our **quality management system** is certified according to **DIN EN ISO 9001:2015** and **KBA-ZM-A** and is regularly reviewed. We are also certified by numerous commercial vehicle manufacturers as a construction and reconstruction partner for the vehicle body segment. We can regularly document **our quality promise** through recurring checks and through our products themselves.

As a customer, you benefit from this twice:  
**While using and when reselling.**





More information is available online at  
[humbaur.com/en/dealersservice/downloads/](https://www.humbaur.com/en/dealersservice/downloads/)

Do you have any questions about this or another trailer  
from our range or would you like a personal consultation?  
We look forward to hearing from you.

Contact us by phone on **+49 (0)821 24 929 - 0** or  
by email at [info@humbaur.com](mailto:info@humbaur.com)

**YOUR HUMBAUR CONTACT IN YOUR AREA**

